

3000 Series

Diesel Engine –
Electropak

The Perkins 3000 Series is a family of well proven 8 and 12 cylinder vee form diesel engines designed in advance of today's uncompromising demands within the power generation industry including superior performance and reliability.

The 3012TG is a turbocharged 12 cylinder diesel engine. Its premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, commonality of components, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market.

3012TG

515 kWm 1500 rev/ min
585 kWm 1800 rev/ min



Economic power

- Directed inlet ports in monobloc cylinder heads give optimised gas flows. High compression ratios combined with high injection pressures, ensure ultra fine fuel atomisation and controlled rapid combustion with low emissions. Commonality of components with other engines in the 3000 Series family for reduced stocking levels.

Reliable power

- Developed and tested using latest engineering techniques and finite element analysis for high reliability. Low oil usage and low wear rates. High compression ratios also ensure clean rapid starting in all conditions. A worldwide network of 4000 distributors and dealers.

Compact, efficient power

- Exceptional power to weight ratio and compact size give optimum power density and make installation and transportation easier. Designed to provide excellent service access for ease of maintenance.

Engine Speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
		kVA	kWe	Gross		Net	
				kW	bhp	kW	bhp
1500	Continuous Base-load	500	400	441	591	426	571
	Prime Power	550	440	488	648	468	628
	Standby (Maximum)	605	484	530	711	515	691
1800	Continuous Base-load	569	455	512	687	484	649
	Prime Power	625	500	560	751	532	713
	Standby (Maximum)	687	550	613	822	585	784

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/A, ISO 3046/1:1986 BS 5514/1.

Dorating may be required - consult Perkins Engines.

Fuel specification: BS 2869 Class 2 or ASTM D975 D3. Lubricating Oil: 15W40 to ACEA E3.

Generator Powers are typical and are calculated on an average alternator efficiency and power factor (cos φ) of 0.8.

Rating Definitions

Continuous Base-load - Power available for continuous full load operation. Overload of 10% permitted for 1 hour in every 12 hours' operation.

Prime Power - Power available at variable load with an average load factor not exceeding 80% of the Prime Power rating. Overload of 10% permitted for 1 hour in every 12 hours' operation.

Standby (Maximum) - Power available at variable load in the event of a main power network failure up to a maximum of 500 hours per year. No overload is permitted.

3000 Series

3012TG

Standard Electropak Specification

Air Inlet

- Mounted air filters

Fuel System

- In-line fuel injection pump with mechanical governor. Governing to ISO 3046/4:1986 (BS 5514/4) Class A1
- Spin-on fuel filters with primary filter/water separator

Lubrication System

- Wet sump with filter and dipstick
- Full-flow 'spin-on' filters; oil cooler incorporated in filter header

Cooling System

- Gear-driven circulating pump
- Mounted belt-driven fan
- Radiator supplied loose
- System designed for ambients up to 48°C (non-glycol)

Electrical Equipment

- 24 Vdc starter motor and 24V 40 Amp alternator with DC output
- 24 Vdc instrument senders/switches for oil pressure, coolant temperature and coolant level
- 24 Vdc stop solenoid (energised to run)

Flywheel and Housing

- High inertia flywheel to SAE J620 Size 18
- SAE O flywheel housing
- Position for magnetic speed sensor

Mountings

- Front mounting bracket

Literature

- User's Handbook and Parts Manual


Optional Equipment

- Barber-Colman Electric Governor
- 240 Volt/1500 Watt immersion heaters (2)
- Hours Counter
- Electric Tachometer with speed sensor

General Data

Number of cylinders	12
Cylinder arrangement	60° vee form
Cycle	4-stroke
Induction system	Turbocharged
Combustion system	Direct injection
Cooling system	Water-cooled
Bore and stroke	135 x 152 mm
Displacement	26.11 litres
Compression ratio	14.5:1
Direction of rotation	Anti-clockwise viewed on flywheel
Firing order	A1, B 6, A4, B3, A2, B5, A6, B1, A3, B4, A5, B2
Total lubrication system capacity	73.8 litres
Total coolant capacity	122.7 litres
Dry weight (Electropak)	231.5 kg
Length	2239 mm
Width	1406 mm
Height	1756 mm

Fuel Consumption				
Engine speed	1500 rev/min		1800 rev/min	
	g/kWh	l/hr	g/kWh	l/hr
At Standby/Maximum rating	217	133.0	219	152.5
At Prime Power rating	216	120.3	218	138.1
At Baseload rating	215	109.0	219	126.2
At 75% of Prime Power rating	216	90.3	222	106.4
At 50% of Prime Power rating	225	62.7	237	75.1

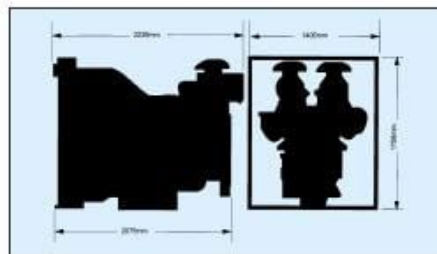

Perkins Engines Company Limited

Lancaster Road, Shrewsbury, SY1 3NX, England
 Telephone (01743) 212000 Telex 351 71 PELS G
 Fax (01 743) 21 2700
www.perkins-engines.com

All information in this document is substantially correct at the time of printing but may be altered subsequently by the company.

Distributed by

فروشگاه موسی



ایمیل: info@moosashop.ir
 وبسایت: www.moosashop.ir
 آدرس: سعدي جنوبی جنب بانک
 ملی ساختمان تقی نیا طبقه دوم
 واحد ۲۰۲